




MRH5000

5" NEW CONSTRUCTION • NON-IC AIRTIGHT
LINE VOLTAGE
RECESSED DOWNLIGHTS

Type	
Project	
Catalog No.	

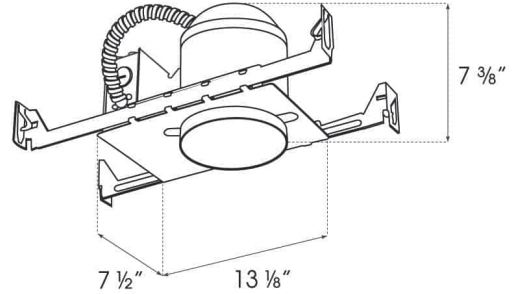

Ceiling Cutout 5 1/2" Ø

ORDERING INSTRUCTIONS

MODEL: MRH5000

DESCRIPTION

- 5" New Construction Non-IC Airtight Line Voltage Housing.
- Thermally protected, listed for damp locations.
- UL listed for feed-through branch circuit wiring.
- Dimmable with incandescent dimmers.
- J-box accessible through ceiling cut-out.
- Non-IC units require 3-inch clearance on all sides.
- Dimensions: 7 1/2"W x 13 1/8"L x 7 3/8"H
- Hanger Bars: adjustable up to 24"
- Cut-Out: 5 1/2" Ø

LAMPS:

120V PAR20, PAR30, R20, R30, A19 75W Max. Sold separately.

WIRING:

Housing is supplied with thermal protector.
Pulse-rated Socket to prolong life of LED bulbs.

TRIMS



FD5018-WHWH
Metal Step Baffle
3 5/8" A x 6 1/4" Ø



FD5018-WHBK
Metal Step Baffle
3 5/8" A x 6 1/4" Ø



FD-5018-SN
Metal Step Baffle
3 5/8" A x 6 1/4" Ø



FD5018-WHCH
White Trim/Chrome
Reflector Aperture Cone
4 1/4" A x 6 1/4" Ø



FD-5013-WH
Adjustable Gimbal Ring
Also available in Satin
Nickel
4 1/4" A x 6 1/4" Ø
Vertical Adj: 30°



LUX Unlimited, Inc.
4121 NW 27th St.
Miami, FL 33142

800-326-4256
305-871-8774
futuredesigns1@hotmail.com

www.futuredesigns.us