

2835 Top LED Tape



One BIN only
for a CCT range



Lifetime



Certified




Certified



Certified



Warranty

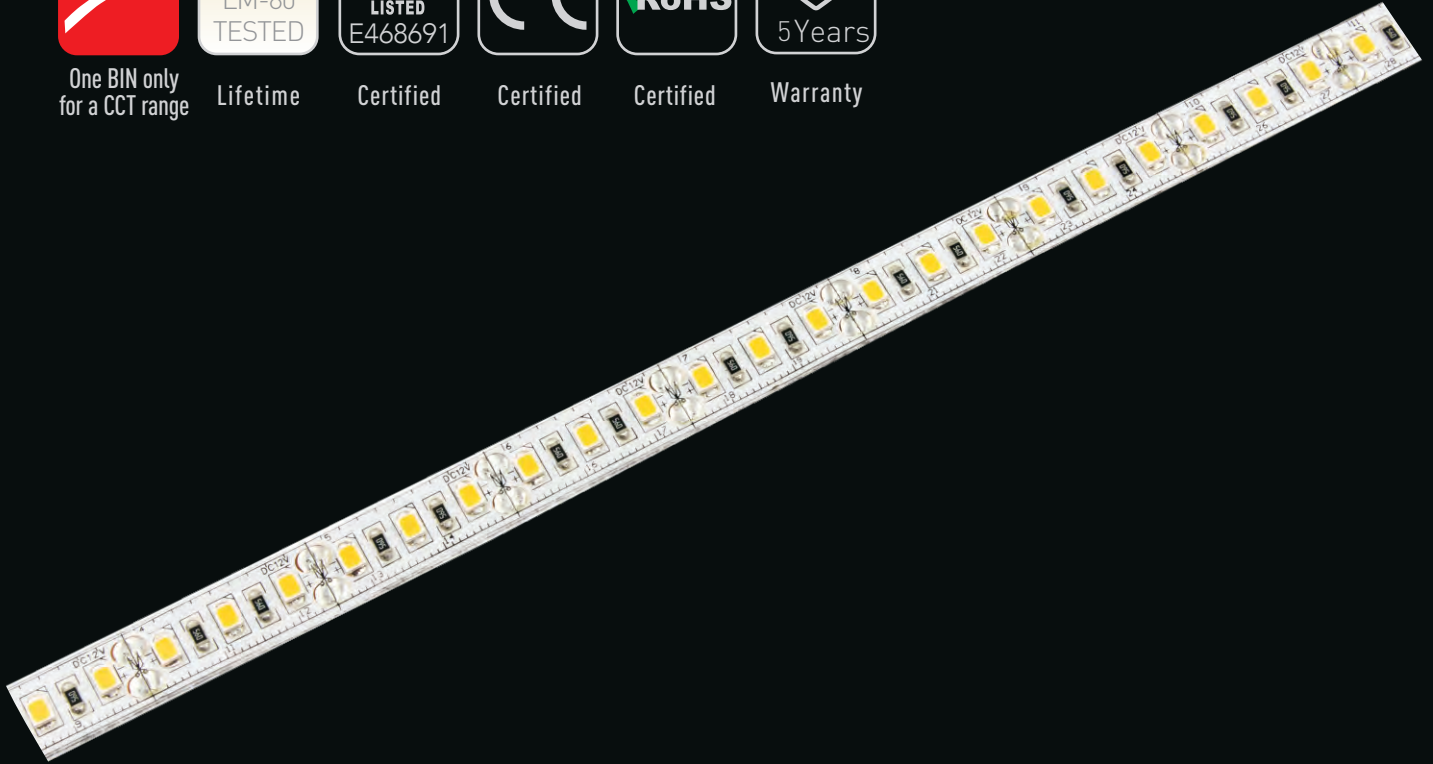

Ra Available

IP Grade Available



Features

- Super bright 2835 LEDs
- Epistar chips, LM-80 tested
- Ra90+ /80+, with high R9 & R13 value
- Wide color temperature range, one bin only for one CCT
- Silicone extrusion (IP68), tube encased (IP67), silicone coated (IP65) & indoor (IP22) are available
- Cuttable every 3 LEDs for 12V, 6 LEDs for 24V
- 3M double sided tape for easy installation
- cULus Listed, 5 years warranty




LUX Unlimited, Inc.

4121 NW 27th St.
Miami, FL 33142
Tel.: 305-871-8774 Fax: 305-871-8786
futuredesigns1@hotmail.com

Specifications are subject to change without notice.
© Blueview™ 2016 – All rights reserved. Made in China.














Visit our website at
www.futuredesigns.us



2835 Top LED Tape

Specifications

LED Type	SMD 2835	Dimmable	Yes (compatible with BV311 RF dimmer & BV Dimmer)
LED Q'ty/m	120pcs	IP grade	IP22 (IP65/68 available upon request)
Input Voltage	12V/24VDC Constant Voltage	Installation	3M™ double sided tapelmounting clips for IP68)
Power	14.4W	Working Temperature	-25 ~ +60°C
Cutting length	12V 25mm 3 LEDs 24V 50mm 6 LEDs	Max run	12V 4.5 meters 24V 8 meters
Strip Width	10mm	Certification	E354137 cULus Listed, CE, RoHs
Viewing Angle	120°	Warranty	5 years ^o

Order Code	CCT/ Color	CRI	Lumen/M ²
FD-2835A-120-12-27K	 2600-2900K	80	1160
FD-2835A-120-12-30K	 2800-3200K	80	1160
FD-2835A-120-12-40K	 3800-4260K	80	1160
FD-2835A-120-12-50K	 5000-5500K	80	1200
FD-2835A-120-12-60K	 6000-6500K	80	1300
FD-2835A-120-12-70K	 6000-8000K	80	1300
FD-2835A-120-12-90K	 8000-10000K	80	1300
FD-2835A-120-12-100K	 9000-12000K	80	1300
FD-2835A-120-12-R	 620-625nm	-	376
FD-2835A-120-12-G	 520-525nm	-	1100
FD-2835A-120-12-B	 465-470nm	-	288
FD-2835A-120-12-Y	 594-596nm	-	336
FD-2835A-120-12-O	 600-605nm	-	300

- Note: 1. Contact Blueview for exact warranty period and policy
 2. Lumen output are measured according to PMS-80, with a tolerance of +/- 5%
 3. Standard package: 5m/roll

Order Code


Model	Quality level	LED Q'ty/M	Input voltage	CCT/Color
FD	2835A	120	12	25K
FD-P22 FWS-IP65 FWT-IP67 FWE-IP68	2835B-5yrs warranty		12-12V DC 24-24V DC	view table above for options



LUX Unlimited, Inc.
 4121 NW 27th St.
 Miami, FL 33142
 Tel.: 305-871-8774 Fax: 305-871-8786
 futuredesigns1@hotmail.com

Specifications are subject to change without notice.
 ©Blueview™ 2016 – All rights reserved. Made in China.


Visit our website at
www.futuredesigns.us




2835 Top LED Tape

Dimension

Unit:mm[in]

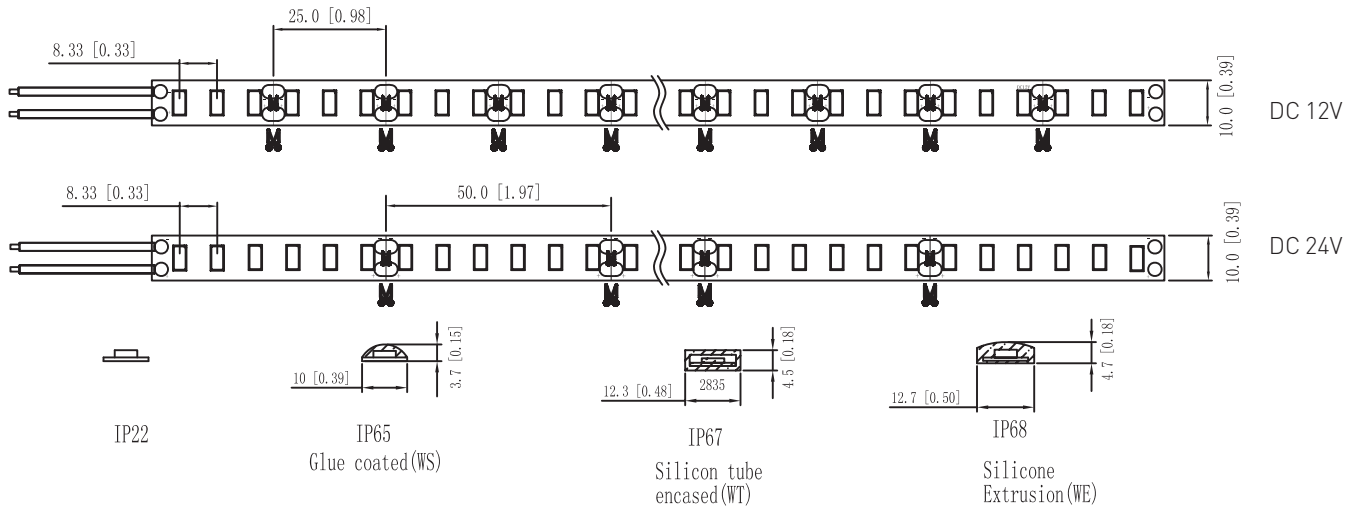

Package

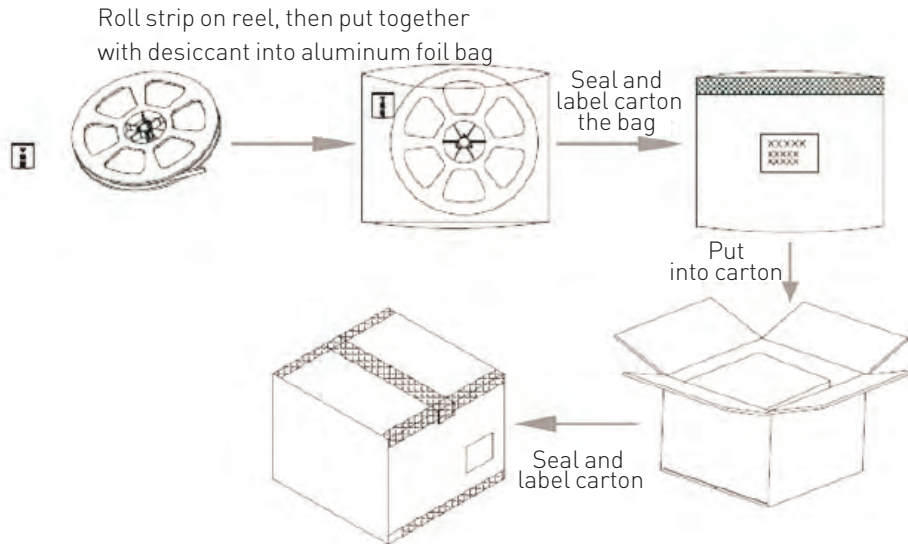

Packing Info

Order Code	Net Weight / CTN	Gross Weight / CTN	Units / CTN	Carton Size
FD-2835A-120	12.0 (1±10%) kgs	15.0 (1±10%) kgs	100 rolls	550*400*340mm
FWS-2835A-120	25.0 (1±10%) kgs	26.0 (1±10%) kgs	100 rolls	550*400*340mm
FWT-2835A-120	25.0 (1±10%) kgs	26.0 (1±10%) kgs	100 rolls	550*400*340mm
FWE-2835A-120	30.0 (1±10%) kgs	32.0 (1±10%) kgs	60 rolls	550*400*340mm



LUX Unlimited, Inc.
 4121 NW 27th St.
 Miami, FL 33142
 Tel.: 305-871-8774 Fax: 305-871-8786
 futuredesigns1@hotmail.com

Specifications are subject to change without notice.
 © Blueview™ 2016 – All rights reserved. Made in China.

Visit our website at
www.futuredesigns.us